

Adjust-A-Jaw® Tensioners

Sleek, stainless steel tensioners that mount on the outside of your post.

Easy to install

You can use our Invisiware fixed tabs or threaded tabs (page 28) or lag eyes (page 29) to mount Adjust-A-Jaw tensioners to your end posts. Or you can mount them using flat bar or angle iron welded to your post with holes drilled to accept the clevis. See the tabulated drawing and chart below to determine how this fitting interfaces with your end post.

The clevis has a male thread that mates with the female thread within the body of the tensioner. The swaging ferrule is swaged onto the cable and holds the cable inside the body. The body rotates on the cable and provides a considerable amount of take-up during tensioning with an open-end wrench. After tensioning, the lock nut locks the assembly in place.




Use on level runs or stairs

Adjust-A-Jaw tensioners are precision machined, streamlined devices that are used where a high-tech look is desired, where you may wish to see hardware on your railing, or where you are unable to use Invisiware receivers (page 11) because there is no access to the back of the end post.



Unlike many common turnbuckles, Adjust-A-Jaw tensioners have **no sharp edges, no crevices to collect dust and dirt, no unsightly nuts on the end, ugly swaged shanks or anything that will scratch or snag.**

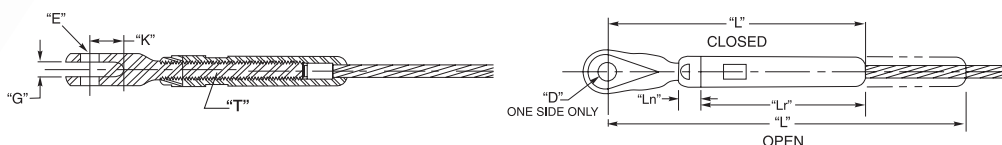

TYPE 316 STAINLESS STEEL

CABLE DIA.	PART NO.	*USE WITH FERRULE NO.	*USE WITH SCREW NO.	"D" DIA.	"E" THREAD	"G"	"K"	"L" CLOSED	"L" OPEN	"Ln"	"Lr"	"T"
1/8"	A-J62	F-4	SC-6	.260"	1/4-28	.260"	.56"	4.30"	5.99"	.375"	2.75"	5/16-24 LH
3/16"	A-J62	F-6	SC-6	.260"	1/4-28	.260"	.56"	4.30"	5.99"	.375"	2.75"	5/16-24 LH
1/4"	A-J82	F-8	SC-8	.390"	3/8-24	.313"	.75"	4.87"	6.43"	.500"	3.00"	7/16-20 LH
5/16"	A-J122	F-10	SC-8	.390"	3/8-24	.348"	.87"	6.74"	9.28"	.620"	4.50"	9/16-18 RH
3/8"	A-J122	F-12	SC-8	.390"	3/8-24	.348"	.87"	6.74"	9.28"	.620"	4.50"	9/16-18 RH

*Order Ferrule and Screw Separately.