


Outside-of-Post to Outside-of-Post Mount _____ Metal Posts

Cable Runs through Two Corners

When going around two corners, it's necessary to tension the cable from both ends as shown in Deck 3.

Applicable kit is the 272 Series.


The tensioning devices are a 3½" long Invisiware Receiver, which installs through the post on one end, and a Push-Lock Stud on the other end, which is threaded into a 1½" long Receiver.

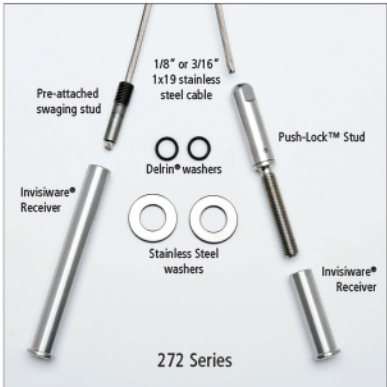

Since the 272 Series is also used for wood posts, the kits include stainless steel washers.

Series 272 Kits

Cable Length	1/8" cable	3/16" cable
	PART NO.	PART NO.
30'	27230	27230-6
40'	27240	27240-6
50'	27250	27250-6
60'	27260	27260-6

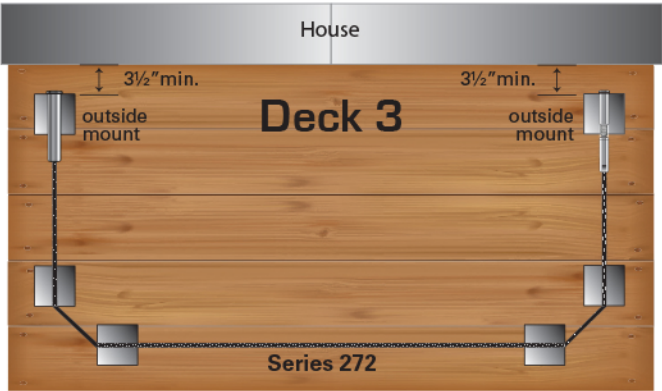

Tools needed for 272 Series:

- 5/32 drill bit if 1/8" cable, 7/32 if 3/16"
- 29/64 drill bit for Receivers and Pull-Lock installation
- 3/16 Hex wrench for tensioning Receiver
- Cable cutting tool
- 7/16 wrench for tightening Push-Lock Stud

